

Electric Towel Rail · Series

Comfort

A timeless warmth for every bathroom

SERIES 212030 — 212033
212230 — 212233
GTIN · 70406621203..
GTIN · 70406621223..
3 sizes · 2 finishes



EcoDesign
2.0 Ready



11M CABLE
incl. PILOT WIRE



MADE IN
EUROPE



EASY
INSTALL



DISPLAY
EASY USE



SPLASHPROOF
IP 44




DIGITAL
THERMOSTAT



DOUBLE
INSULATED



5
YEARS
WARRANTY

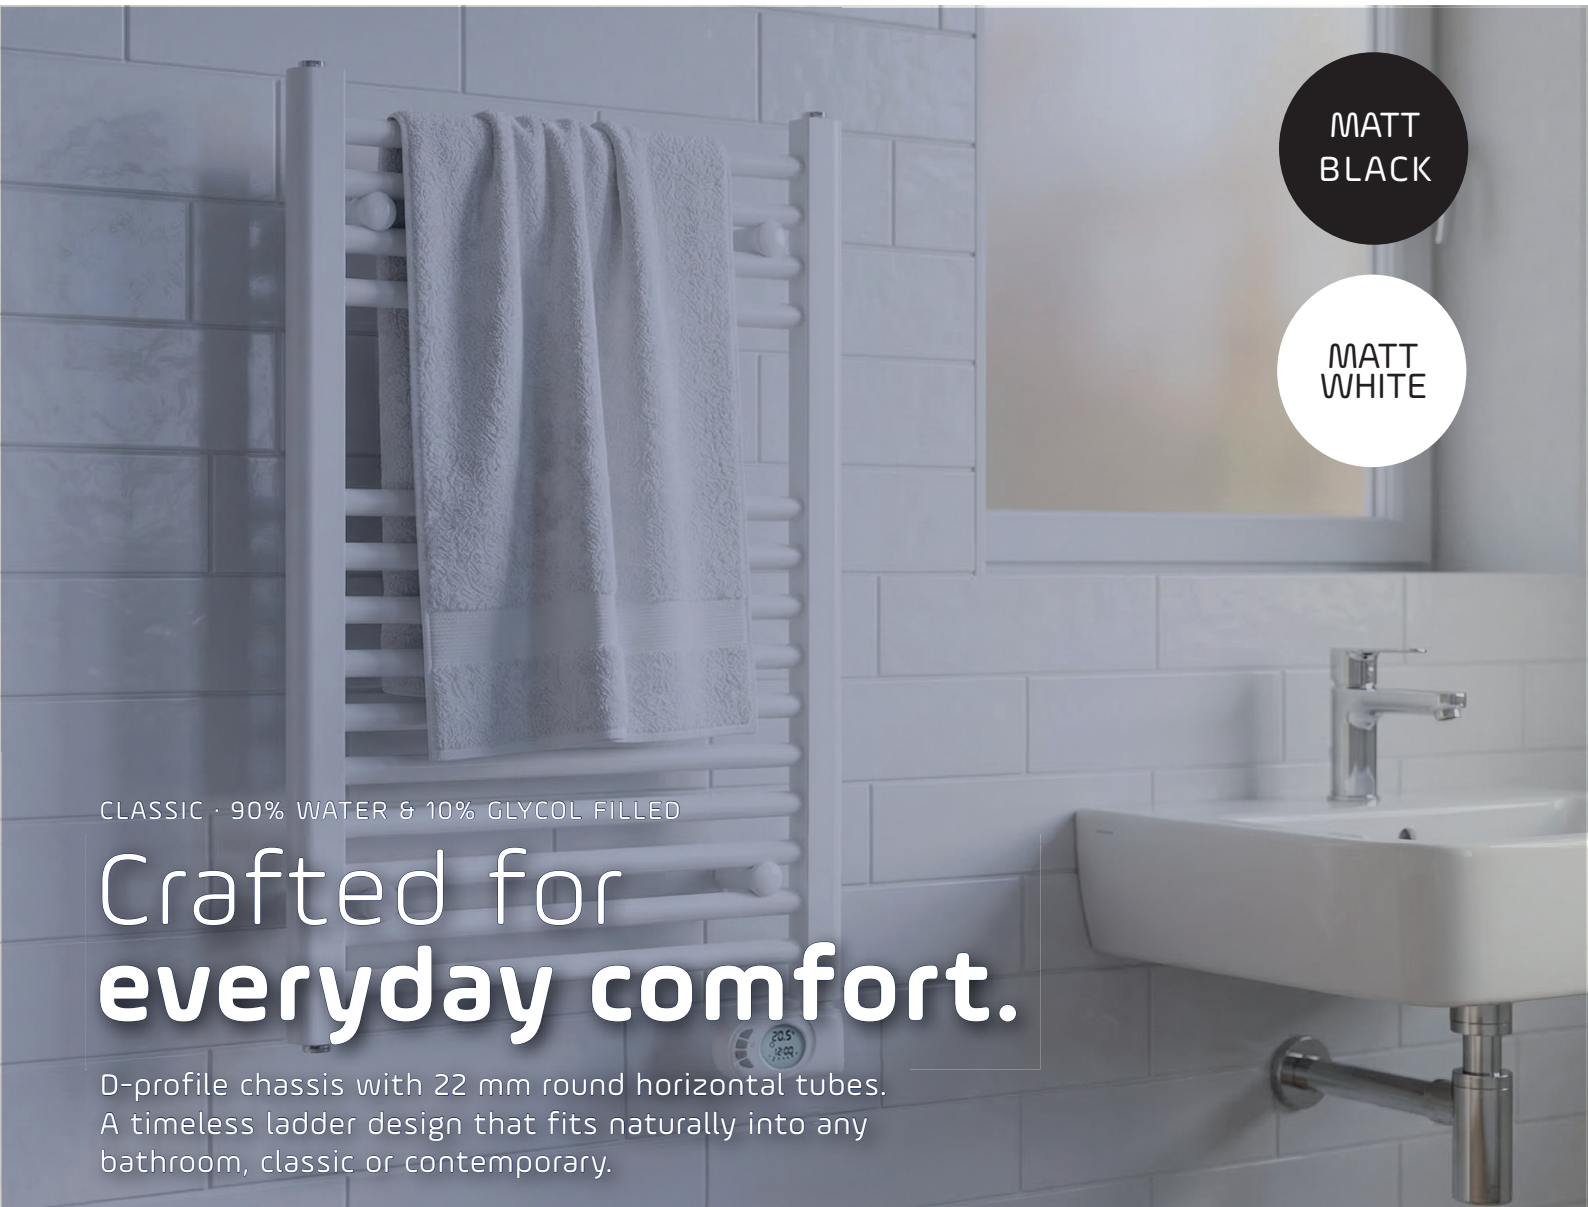

MATT
BLACK

MATT
WHITE

CLASSIC · 90% WATER & 10% GLYCOL FILLED

Crafted for everyday comfort.

D-profile chassis with 22 mm round horizontal tubes.
A timeless ladder design that fits naturally into any
bathroom, classic or contemporary.

THE COMFORT FAMILY

Three sizes.
One classic form.

Matched outputs and proportions each rail tuned to its room and its towel count.

212030 /
212230



300W 500 x 874 mm

212031 /
212231



500W 500 x 1374 mm

212032 /
212232



600W 500 x 1574 mm



Six references. One classic form.

Every Comfort ships filled with a 90/10 water-glycol blend for even heat across the rail and long warmth after switch-off. The integrated Musa Eco controller sits bottom-right plug-and-play with a 230 V Type F outlet, no plumber required.

CLASS	Class II · double insulated
PROTECTION	IP44 splash-proof · IK09 impact resistant
SUPPLY	230 V / 50 Hz · Pilot wire · 1.1 m cable without plug
SURFACE	Powder coat DIN 55900 · RAL 9016 (white) / 9305 (black)
MAX. SURFACE	80°C (per norm)
WORKING TEMP	90°C
FLUID	90 % water / 10 % glycol (pre-filled)
MATERIAL	Black steel
ECODESIGN	EcoDesign 2.0 Ready
CERTIFICATION	CE certified · tested to EN 60335-2-30 & -43
WARRANTY	5 years · Made in Europe

Overview of models


ELECTRIC OPERATION · WITH MUSA ECO

ITEM	CODE	GTIN	OUTPUT	H INCL.	H EXCL.	W	D	FILL	WEIGHT	TUBES
○ Comfort 50-80-300 White	212030	7040662120305	300 W	874	800	500	30	3.06 L	8.8 kg	14
○ Comfort 50-130-500 White	212031	7040662120312	500 W	1374	1300	500	30	4.77 L	13.4 kg	21
○ Comfort 50-150-600 White	212032	7040662120329	600 W	1574	1500	500	30	5.49 L	15.3 kg	24
● Comfort 50-80-300 Black	212230	7040662122309	300 W	874	800	500	30	3.06 L	8.8 kg	14
● Comfort 50-130-500 Black	212231	7040662122316	500 W	1374	1300	500	30	4.77 L	13.4 kg	21
● Comfort 50-150-600 Black	212232	7040662122323	600 W	1574	1500	500	30	5.49 L	15.3 kg	24

All models are supplied with wall brackets, fixing kit and user manual.

Dimensional drawings

ALL MEASUREMENTS IN MM

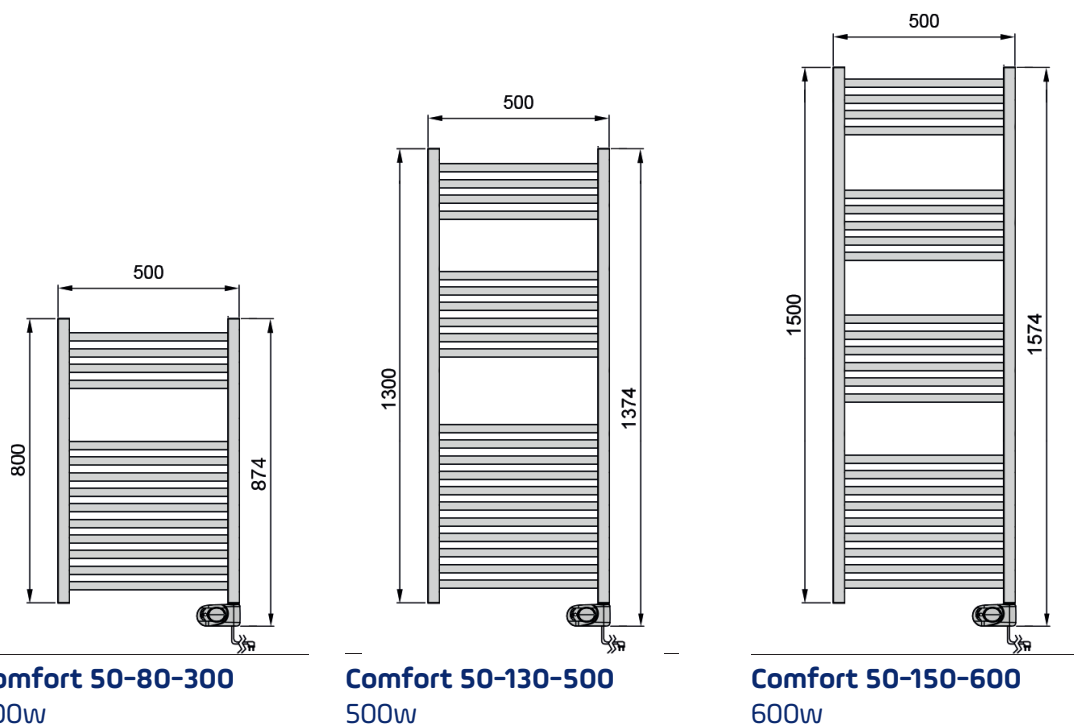

MUSA ECO

Simple. User-friendly. Efficient.

CHRONO · BOOST · COMFORT
NIGHT · ANTI-FREEZE · PILOT



OPERATING MODES · 7

Seven ways to warm your day.

01 Comfort

Your chosen set point — held precisely when you're home.

02 Night

A quiet, lower setback while you sleep.

03 Chrono

Hour-by-hour weekly programme, fully customisable.

04 Boost · 2 h

Rapid warm-up for damp towels, then back to comfort.

05 Anti-freeze

Holds 7°C automatically — for holidays and guest rooms.

06 Open-window

Cuts output when a drop in temperature is detected.

07 Pilot Wire

Central-control compatible for integrated homes.

· Key-Lock

Prevents unintended setting changes in public spaces.

Range	7 – 30 °C, $\pm 0.5^{\circ}\text{C}$ step
Display	Large digital LCD · mode + temperature
Protection	IP44 · Class II · CE marked
Install	Factory-mounted bottom-right · 1.1 m cable (no plug)
Finish	Matched RAL 9016 / RAL 9305 matt

EST.
1948



Since 1948, Adax has been keeping Scandinavians warm. Born in Norway, built for harsh winters — we understand what reliable, efficient heating really means. A quiet warmth, designed to last through generations.